

DISPLAY OUTFIT JU2

SUMMARY OF DATA

PURPOSE

Weatherproof remote display used with Type 974.

POWER REQUIREMENTS

80V 1000 c/s A.C. to Patt. 100012 Power Pack.

HEAT DISSIPATION

Patt. 100012 Power Pack - 100 watts.


Patt. 102650 Display Unit (weatherproof), 5 in.
- 100 watts.

MAJOR UNITS

Patt. 102650 Display Unit (weatherproof), 5 in.

Patt. 100012 Power Pack for Remote Display.

Patt. 100011 Junction Box.

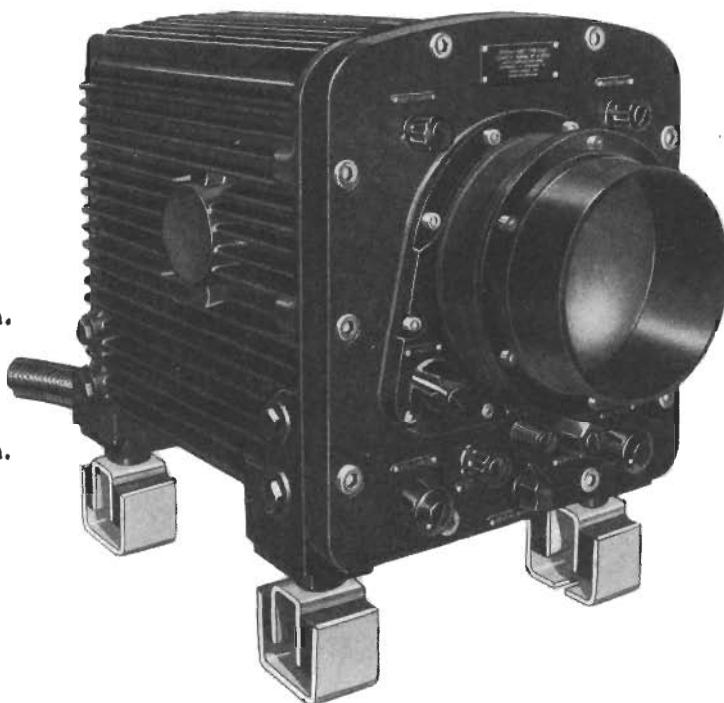

DISPLAY UNIT (WEATHERPROOF) 5 INCH

PHYSICAL DATA

	<u>Height</u>	<u>Width</u>	<u>Depth</u>	<u>Weight</u>
Patt. 102650 Display Unit	1'7 $\frac{1}{2}$ "	1'1 $\frac{1}{2}$ "	1'6 $\frac{1}{2}$ "	125 lb.
Patt. 100012 Power Pack	1'10"	1'0"	11 $\frac{1}{2}$ "	50 lb.

BRIEF DESCRIPTION

Display Outfit JU2 is a complete weatherproof Display Unit. There are four operating ranges 1, 3, 10 and 25 miles, and calibration markers are provided for these ranges at 1/5, 1/2, 1 and 5 mile intervals respectively.

REMARKS

By means of a weatherproof control unit, the display may be converted from slave to master.

HANDBOOK

B.R.1983 (ADM)

ESTABLISHMENT LIST

E.1032

INSTALLATION SPECIFICATION

B.728